

Key Specifications

- Full featured Wi-Fi 6, 6 Stream AP
- 4x4:4 5GHz Radio + 2x2:2 2.4 GHz Radio
- Up to 0.6 Gbps throughput for 2.4 GHz radio
- Up to 2.4 Gbps throughput for 5 GHz radio
- Additional 2x2 dual band radio for dedicated RF and WIPS scanning
- Integrated omnidirectional antennas
- 20/40/80/160 MHz channel width support
- 5 Gigabit + 1 Gigabit Ethernet ports
- Support for DL MU-MIMO
- Support for UL/DL OFDMA
- 802.3at PoE support
- Wall and ceiling mounting options

Key Features

- Distributed Data Plane architecture
- Zero-touch deployment through automatic cloud activation and configuration
- Cloud or on premises management plane options
- Operating modes for dedicated access, dedicated security or dual mode
- Support for up to 8 distinct SSIDs per radio
- Integrated firewall, traffic shaping, QoS and BYOD controls per SSID
- Dynamic RF optimization through smart steering, band steering and optimal channel selection
- Application visibility through layer 7 deep packet inspection
- Automated device access logging
- Patented Marker Packets™ technology for rogue AP detection and classification
- Wired VLAN monitoring for "No-WiFi" zone enforcement
- Third party analytics integration with real-time data transfer
- Versatile 3rd radio for WIPS, Spectrum Analysis, Scanning and Client Connectivity Tests

Aesthetic Design and High Performance

Arista C-230 is an enterprise-grade, 6 stream Wi-Fi 6 AP with dual concurrent 5 GHz and 2.4 GHz band radios supporting 4 stream 802.11 a/n/ac/ax, 2 stream 802.11 b/g/n/ax and data rates of up to 2.4 Gbps and 0.6 Gbps, respectively.

C-230 Capabilities

C-230 provides Gen 2 Wi-Fi 6 performance improvements to deliver higher capacity and more efficient use of the available spectrum. It provides industry leading user experience and throughput in high density environments. Uplink/ Downlink OFDMA channelization allocates bandwidth more efficiently across client devices to provide a better user experience. The ability to serve multiple clients simultaneously through DL MU-MIMO further improves system capacity and user experience.

C-230 is ideal for critical, high-density networks serving a high volume of diverse clients and applications. Common deployment scenarios include large schools, large remote offices, auditoriums, meeting rooms, and enterprise campuses.

Arista CloudVision® Managed Wi-Fi

The C-230 is an Arista CloudVision Wi-Fi managed platform. Available as a cloud service or on prem management platform, CloudVision Wi-Fi leverages a purpose-built cloud architecture delivering cloud grade analytics and automation to enterprise Wi-Fi networks. CloudVision ensures high reliability, scalability, security and cost effectiveness.

Versatile, multipurpose 3rd Radio

C-230 comes with a versatile multipurpose 2x2:2 dual band 802.11ac third radio that provides:

- Industry leading, continuous WIPS and spectrum analysis
- Better RRM decisions from continuous spectral visibility
- Network availability and performance assurance by On-demand and scheduled client connectivity test



Arista C-230

Access

C-230 provides Wi-Fi networks that require less time and resources to deploy and maintain compared to traditional devices, resulting in significant cost savings.

- Plug and play provisioning using either Cloud or On-premise deployments - Arista Access Points take less than two minutes to activate and configure after connecting to the cloud
- Support for up to eight individual SSIDs per radio providing maximum flexibility in network design
- Network controls like NAT, Firewall and QoS implemented at the Access Point, ensuring faster and more reliable networks
- Continuous scanning of all 2.4 GHz and 5 GHz channels by a dedicated 2x2 third radio provides a dynamic, 360-degree view of the RF environment to assist in RF optimization and client handling
- Network availability and performance assurance using the third radio as a client to conduct on-demand and scheduled connectivity and performance tests
- Smart steering addresses sticky client issues by automatically pushing clients with low data rates to a better access point
- Band steering manages channel occupancy, pushing clients to the 5 GHz channel for optimal throughput
- Smart load balancing distributes load evenly across neighbouring APs to optimize the use of network resources
- Arista Wi-Fi's distributed data plane architecture continues to serve users and secure the network even if connection with the management plane is interrupted
- Interference avoidance from LTE/3G small/macro cells in commonly used TDD/FDD frequency bands

Security

C-230 offers complete visibility and control of the wireless airspace ensuring network integrity while actively protecting users without manual intervention.


- C-230 is equipped with industry leading fully integrated wireless intrusion prevention capabilities
- Multifunction third radio provides uninterrupted spectrum scanning or client emulation for always on security coverage alongside dedicated 2.4G/5G client radios.
- Arista's patented Marker Packets™ help accurately detect rogue access points on any network while minimizing false positives
- Third radio used as a dedicated security sensor for 24x7x365 scanning and automated over-the-air (OTA) prevention
- Deterministic rogue AP detection and prevention by monitoring all WiFi and non-WiFi VLANs.
- Over-the-air and on-the-wire prevention techniques assure automatic and reliable threat prevention to keep unauthorized clients and rogue APs off the network without impacting authorized connections.
- Access Points autonomously scan for wireless threats and enforce security policy even if disconnected from the cloud management plane
- VLAN monitoring enables a virtual connection to non-WiFi networks for complete network rogue detection and prevention



Analytics

The C-230 collects telemetry on connected and unconnected WiFi clients and supports immersive guest network experiences that help Arista's customers develop and reinforce the relationship with their end customers.

- Reports of customer footfall, demographic, loyalty and other analytics provide insightful and actionable information.
- Supports proximity marketing programs that trigger when certain devices are present, which includes automatic messaging via MMS in-browser notifications and real time notifications sent to 3rd party systems that alert to the presence of enrolled devices.

Physical Specifications

	Property	Specification
	Physical Dimensions	205mm x 205mm x 45.8mm/8.1" X 8.1" X 1.8"
	Weight	1kg / 2.2 lb
	Operating Temperature	0°C ~ +40°C (+32°F ~ +104°F)
	Storage Temperature	-25°C ~ +70°C (-40°F ~ +158°F)
	MTBF	343,175 hr @ 40°C 641,425 hr @ 25°C
	Humidity	0-95% non-condensing
	Power consumption	26 W (max) / 11.8 W (min) / 22.8 W (avg)
	Chipset	Qualcomm IPQ8071A 1GHz quad core ARM processor with QCN5154 x2 and QCN5124 QCA9882 (multipurpose third radio)
	Processor and RAM	1 GB RAM and 512 MB Flash

	Port	Description	Connector Type	Speed/Protocol
	Power	12V DC	5.5 mm overall diameter / 2.1 mm center pin hole	N/A
	LAN1	5 Gigabit Ethernet with 802.3at compliant PoE	RJ-45	100/1000 Mbps / 2.5/5 Gbps Ethernet
	LAN2	1 Gigabit Ethernet with 802.3at compliant PoE	RJ-45	100/1000 Mbps Ethernet
	Console	Establish 'config shell' terminal session via serial connection	RJ-45	<ul style="list-style-type: none"> • RS 232 Serial (115200 bits per second) • Data bits:8; Stop bits: 1 • Parity: None • Flow Control: None
	USB	USB 2.0 port	USB	Future use
	Reset	USB 2.0 Reset to factory default settings port	Pin hole push button	Hold down and power cycle the device to reset

Operational Specifications

Input Power	12V DC (5.5mm overall diameter/2.1mm center pin hole) 802.3at PoE - Full function 802.3af power – Reduced Function (No USB; Both 5GHz & 2.4GHz limited to 2x2 operation; Tx power reduced by 6dB for both radios)
Number of Radios	2 access radios; one 2x2:2 2.4GHz and one 4x4:4 5GHz radio for simultaneous dual band access. 1 multi-function 2x2 radio for continuous WIPS, spectrum analysis and client connectivity tests
Max Clients Supported	1024 - 512 clients per radio (dependent upon use cases)
MU-MIMO	4X4 on 5GHz radio and 2X2 on 2.4GHz radio
Number of Spatial Streams	4 for 5GHz radios, 2 for 2.4GHz radio, 2 for multipurpose radio
RF Transmit Power	29dBm on 5GHz radio (max) and 26dBm on 2.4GHz radio (max); Actual power for Tx will depend on Country Regulatory Domain
80+80MHz Non-Contiguous Channel Bonding	Yes
Bandwidth Agility	Yes
3G/4G Macro and Small Cells Interference Mitigation	Yes
Frequency Bands	2.4-2.4835 GHz, 4.9-5.0GHz, 5.15-5.25 GHz; (UNII-1), 5.25-5.35 GHz, 5.47-5.6 GHz, 5.650-5.725 GHz (UNII-2), 5.725-5.85 GHz (UNII-3)
Dynamic Frequency Selection	Supported in compliance to all latest amendments from FCC, CE, IC, TELEC, KCC, NCC and ANZ regarding certifications.

WiFi Specifications

IEEE 802.11a/n/ac/ax			
Frequency Band	Scanning	Transmission	
	All regions	USA & Canada (FCC/IC)	Europe (ETSI)
5GHz Band	4.92 ~ 5.08 GHz 5.15 ~ 5.25 GHz 5.25 ~ 5.35 GHz 5.47 ~ 5.725 GHz 5.725 ~ 5.825 GHz	5.15 ~ 5.25 GHz 5.25 ~ 5.35 GHz 5.725 ~ 5.825 GHz	5.15 ~ 5.25 GHz 5.25 ~ 5.35 GHz 5.47 ~ 5.725 GHz
Dynamic Frequency Selection	DFS and DFS2		
Modulation Type	OFDM / OFDMA		
Peak Data Rates	Up to 2.4 Gbps		
Antenna	Integrated modular high efficiency PIFA antenna x4 (peak gain: 3.9 dBi)		

IEEE 802.11b/g/n/ax			
Frequency Band	Scanning	Transmission	
	All regions	USA & Canada (FCC/IC)	Europe (ETSI)
2.4GHz Band	2400 ~ 2483.5 MHz	2400 ~ 2473.5 MHz	2400 ~ 2483.5 MHz
Modulation Type	DSSS / OFDM / OFDMA		
Peak Data Rates	Up to 0.6 Gbps		
Antenna	Integrated modular high efficiency PIFA antenna x2 (peak gain: 3 dBi)		

Receive Sensitivity

5GHz

Mode	Rate	Sensitivity (dBm)
802.11a	6 Mbps	-93
	54 Mbps	-76
11n_HT20	MCS 0	-94
	MCS 7	-76
11n_HT40	MCS 0	-91
	MCS 7	-73
11ac_VHT20	MCS 0	-94
	MCS 8	-72
11ac_VHT40	MCS 0	-91
	MCS 9	-68
11ac_VHT80	MCS 0	-88
	MCS 9	-65
11ax_HE20	MCS 0	-94
	MCS 11	-65
11ax_HE40	MCS 0	-91
	MCS 11	-62
11ax_HE80	MCS 0	-88
	MCS 11	-59

2.4GHz

Mode	Rate	Sensitivity (dBm)
802.11b	1 Mbps	-98
	11 Mbps	-90
802.11g	6 Mbps	-93
	54 Mbps	-77
11n_HT20	MCS 0	-94
	MCS 7	-76
11n_HT40	MCS 0	-91
	MCS 7	-73
11ax_HE20	MCS 0	-94
	MCS 11	-65
11ax_HE40	MCS 0	-91
	MCS 11	-62

Aggregate Transmit Power

5GHz


Mode	Rate	Power (dBm)
802.11a	6 ~ 18 Mbps	29
	24 ~ 54 Mbps	29
802.11n_HT20	MCS 0 ~ 4	29
	MCS 5 ~ 7	29
802.11n_HT40	MCS 0 ~ 4	29
	MCS 5 ~ 7	29
802.11ac_VHT20	MCS 0 ~ 4	29
	MCS 5 ~ 7	29
	MCS 8 ~ 9	29
802.11ac_VHT40	MCS 0 ~ 4	29
	MCS 5 ~ 7	29
	MCS 8 ~ 9	28
802.11ac_VHT80	MCS 0 ~ 4	29
	MCS 5 ~ 7	29
	MCS 8 ~ 9	28
802.11ax_HE20	MCS 0 ~ 4	29
	MCS 5 ~ 7	29
	MCS 8 ~ 9	29
	MCS 10- 11	28
802.11ax_HE40	MCS 0 ~ 4	29
	MCS 5 ~ 7	29
	MCS 8 ~ 9	28
	MCS 10- 11	28
802.11ax_HE80	MCS 0 ~ 4	29
	MCS 5 ~ 7	28
	MCS 8 ~ 9	28
	MCS 10 ~ 11	28

2.4GHz


Mode	Rate	Power (dBm)
802.11b	1 ~ 11 Mbps	26
802.11g	6 ~ 18 Mbps	26
	24 ~ 54 Mbps	26
802.11n_HT20	MCS 0 ~ 4	26
	MCS 5 ~ 7	26
802.11n_HT40	MCS 0 ~ 4	26
	MCS 5 ~ 7	26
802.11ax_HE20	MCS 0 ~ 4	26
	MCS 5 ~ 7	24
	MCS 8 ~ 9	24
802.11ax_HE40	MCS 10 ~ 11	24
	MCS 0 ~ 4	26
	MCS 5 ~ 7	24
	MCS 8 ~ 9	23
	MCS 10 ~ 11	23

Radiation Patterns

2.4GHz - Peak Gain: 3dBi

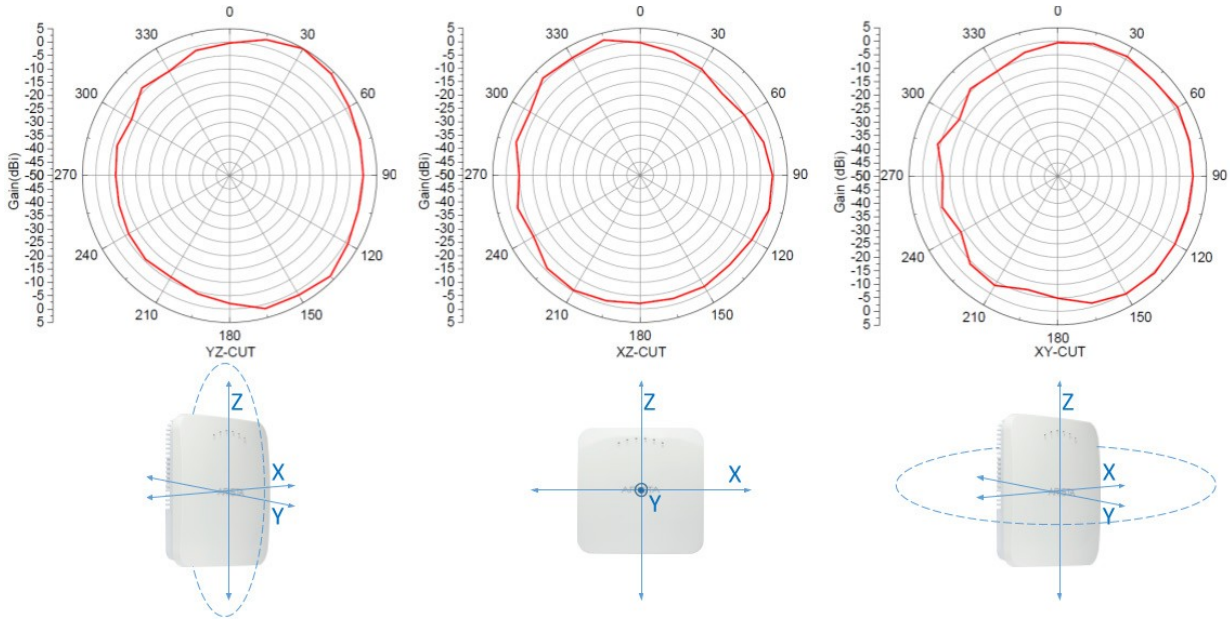

5GHz - Peak Gain: 3.9dBi

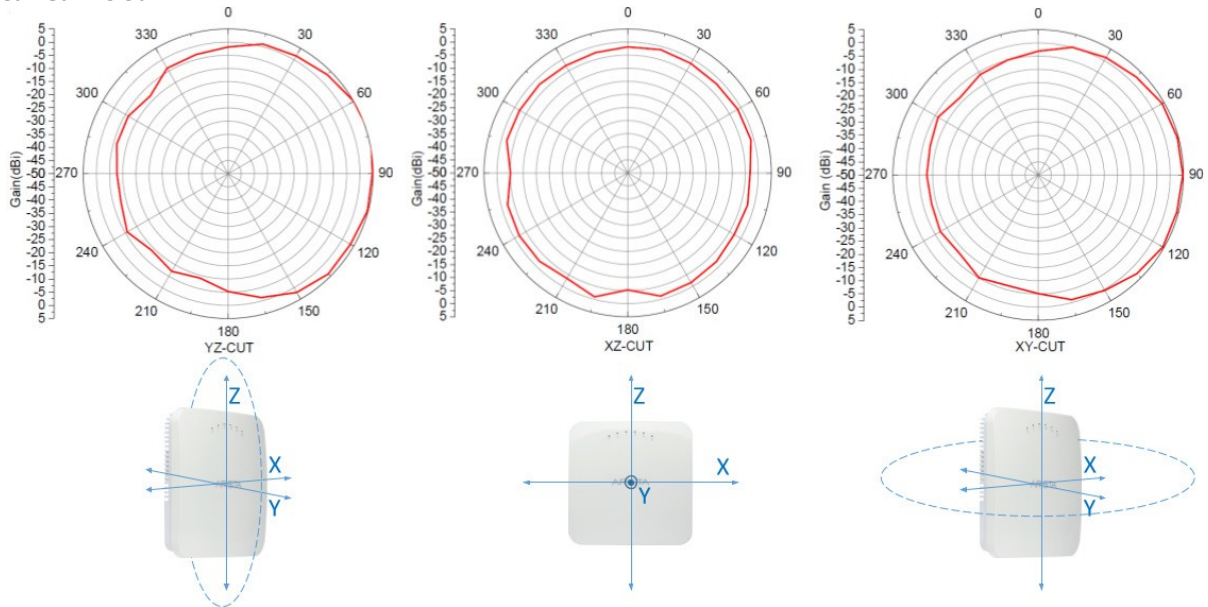

Regulatory Specifications

RF and Electromagnetic

Country	Certification
USA	FCC Part 15.247, 15.407
Canada	IC
Europe	CE EN300.328, EN301.893, EN301 489-1, EN55032, EN62311 Countries covered under Europe certification: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czechia, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, United Kingdom.

*For complete country certification records, please visit the site: <https://www.arista.com/en/support/product-certificate>

Safety

Country	Certification
USA	UL 60950 UL 2043
Canada	cUL 60950
European Union (EU)	EN 60950, EN 62368-1
Taiwan	CNS14336-1

Ordering Information

Access Point

Part Number	Description
AP-C230	C-230 4x4 tri radio 802.11ax (WiFi 6) access point with internal antennas
AP-C230-SS-5Y	C-230 AP with 5 years bundled Cognitive Cloud SW subscription
AP-C230-SS-3Y	C-230 AP with 3 years bundled Cognitive Cloud SW subscription

Mounting Options

For details of mounting options, see the Access Points [Mounting Brackets Guide](#)

Power

Part Number	Description
PWR-AP-W4	Universal AC power supply for C-230, 12VDC, 3.3A
PWR-AP-PLUS-NA	One port 802.3at PoE+ injector for use with all Access Point models. Includes USA power cord. Not for outdoor use.

Headquarters

5453 Great America Parkway Santa
Clara, California 95054
408-547-5500

Support

support-wifi@arista.com
408-547-5502
866-476-0000

Sales

sales@arista.com
408-547-5501
866-497-0000

www.arista.com