

ARISTA

QUICK START GUIDE

VeloCloud SD-WAN Edge Appliances

Edge 710
Edge 710-5G
Edge 724S



Headquarters	Support	Sales
5453 Great America Parkway Santa Clara, CA 95054 USA +1-408-547-5500	+1-408-547-5502 +1-866-476-0000	+1-408-547-5501 +1-866-497-0000
www.arista.com/en/	support@arista.com	sales@arista.com

© Copyright 2026 Arista Networks, Inc. All rights reserved. The information contained herein is subject to change without notice. The trademarks, logos, and service marks ("Marks") displayed in this documentation are the property of Arista Networks in the United States and other countries. Use of the Marks is subject to the Arista Networks Terms of Use Policy, available at www.arista.com/en/terms-of-use. Use of marks belonging to other parties is for informational purposes only.

Contents

- Chapter 1: About This Guide..... 1**
 - 1.1 Intended Audience..... 1
 - 1.2 Document Overview..... 1
 - 1.3 Product and Documentation Updates..... 1

- Chapter 2: Package Content..... 2**

- Chapter 3: Edge Appliance Overview..... 3**
 - 3.1 Edge 710 Panels..... 4
 - 3.2 Edge 710-5G Panels..... 5
 - 3.3 Edge 720 Panels..... 6
 - 3.4 Edge 740 Panels..... 7

- Chapter 4: Installing the Edge Appliance..... 8**

- Chapter 5: Powering On the Edge Appliance..... 9**

- Chapter 6: Connecting the Edge Appliance to the Network..... 10**
 - 6.1 Activating Edge Appliance Using Edge Auto-Activation..... 12

- Appendix A: Regulatory Model Numbers (RMN)..... 13**

- Appendix B: Taiwan RoHS Information..... 14**

About This Guide

This installation guide explains how to deploy the Edge 710, Edge 710-5G, Edge 720, and Edge 740 appliances.



Important: Read the EULA before installing the appliance. You can download and read the EULA from Arista's Product Documentation.

Installing the appliance constitutes your acceptance of the terms and conditions of the EULA mentioned above.

1.1 Intended Audience

This guide can be used by anyone installing and configuring the appliance.

1.2 Document Overview

This guide contains the following chapters:


- [Package Content](#)
- [Edge Appliance Overview](#)
- [Installing the Edge Appliance](#)
- [Powering On the Edge Appliance](#)
- [Connecting the Edge Appliance to the Network](#)

1.3 Product and Documentation Updates

To receive important news on product updates, visit Arista's Product Documentation. We continuously enhance our product documentation based on customer feedback.


Package Content

Figure 2-1: Edge 710, Edge 720, Edge 740 Package Contents

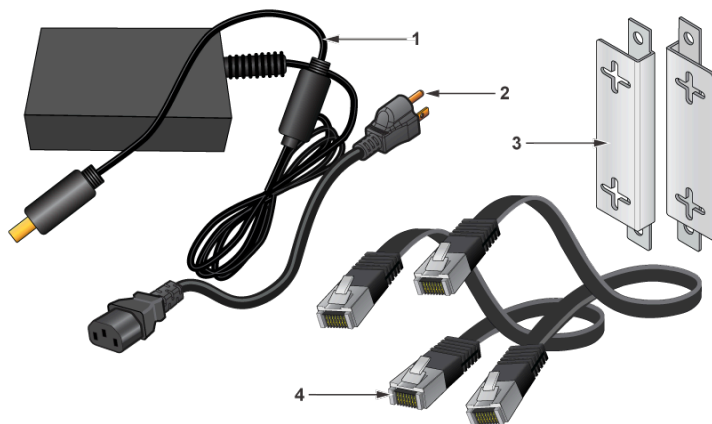

- | | | | |
|---|------------------------|---|----------------|
| 1 | Power Adapter | 2 | Power Cord |
| 3 | 2x Wall Mount Brackets | 4 | 2x RJ45 Cables |

Figure 2-2: Edge 710-5G Package Contents

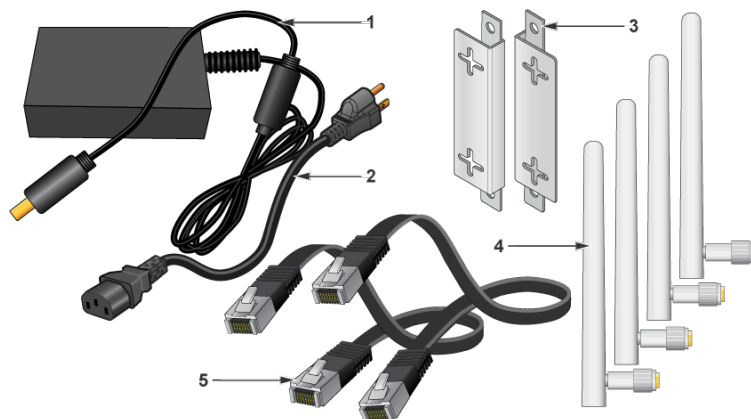

- | | | | | | |
|---|---------------|---|----------------|---|------------------------|
| 1 | Power Adapter | 2 | Power Cord | 3 | 2x Wall Mount Brackets |
| 4 | 4x Antennas | 5 | 2x RJ45 Cables | | |

! **Important:** Screws for wall mounting are NOT included. Select standard screws based on the the weight of the product for a secure mount.

If you don't have a complete package, contact the Arista Networks Technical Support Team at <http://support-campus@arista.com> or return the package to the vendor or dealer where you purchased the product.

Edge Appliance Overview

The Edge 710 and Edge 710-5G appliances are multi-radio 802.11ax appliances. Refer to the [datasheet](#) for more information.


This section provides an overview of the following appliances:

- [Edge 710](#)
- [Edge 710-5G](#)
- [Edge 720](#)
- [Edge 740](#)

3.1 Edge 710 Panels


This section discusses the Edge 710 appliance front and back panels.

Figure 3-1: Edge 710 Front Panel

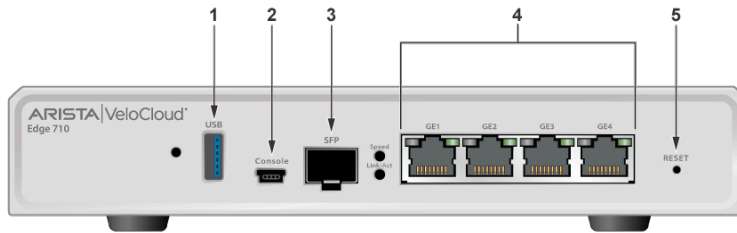

- 1 USB Port
- 2 Console Port
- 3 1x 1G SFP Port
- 4 4x 1G RJ-45 Ports
- 5 Reset Button

Figure 3-2: Edge 710 Rear Panel

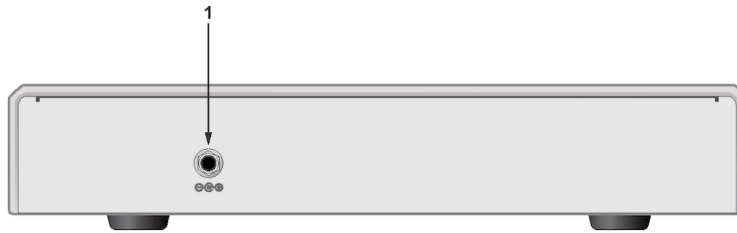


- 1 Power Adapter Port

3.2 Edge 710-5G Panels


This section discusses the Edge 710-5G appliance front and back panels.

Figure 3-3: Edge 710-5G Front Panel

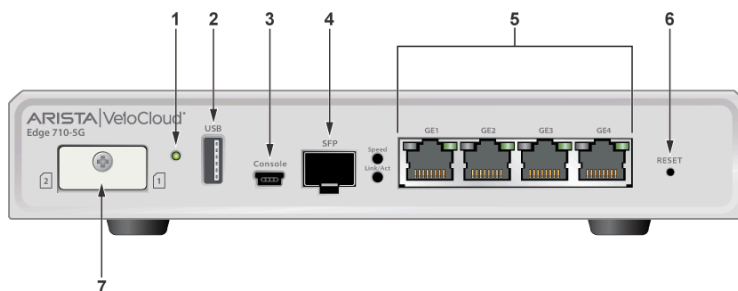

- | | | | | | |
|---|----------------|---|-------------------|---|--------------|
| 1 | Status LED | 2 | USB Port | 3 | Console Port |
| 4 | 1x 1G SFP Port | 5 | 4x 1G RJ-45 Ports | 6 | Reset Button |
| 7 | SIM Card Slot | | | | |

Figure 3-4: Edge 710-5G Rear Panel

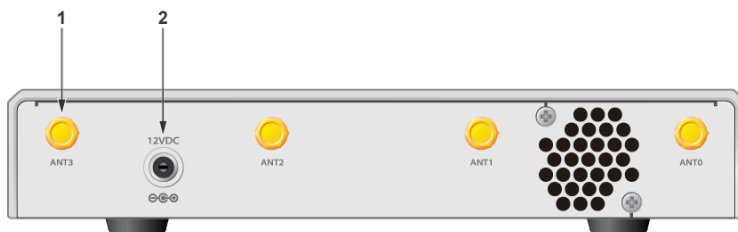


- | | | | |
|---|------------------|---|--------------------|
| 1 | 4x Antenna Ports | 2 | Power Adapter Port |
|---|------------------|---|--------------------|

3.3 Edge 720 Panels


This section discusses the Edge 720 appliance front and back panels.

Figure 3-5: Edge 720 Front Panel

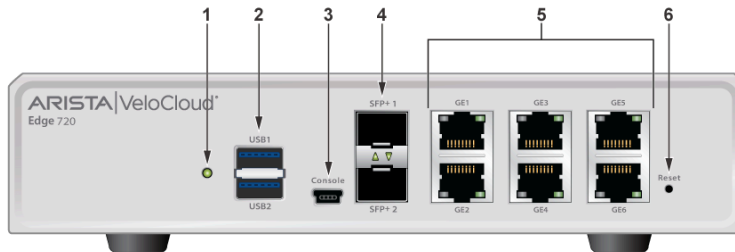

- | | | | | | |
|---|----------------------|---|---------------------|---|--------------|
| 1 | Status LED | 2 | 2x USB Ports | 3 | Console Port |
| 4 | 2x 1G/10G SFP+ Ports | 5 | 6x 2.5G RJ-45 Ports | 6 | Reset Button |

Figure 3-6: Edge 720 Rear Panel

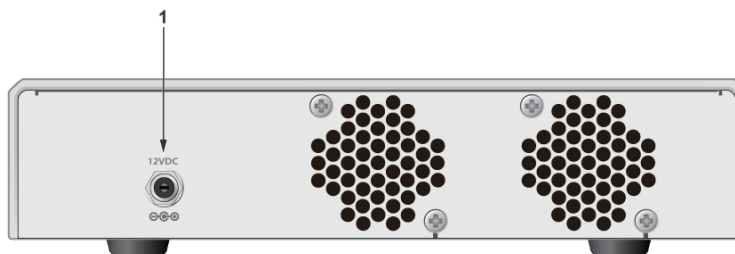


- | | |
|---|--------------------|
| 1 | Power Adapter Port |
|---|--------------------|

3.4 Edge 740 Panels


This section discusses the Edge 740 appliance front and back panels.

Figure 3-7: Edge 740 Front Panel

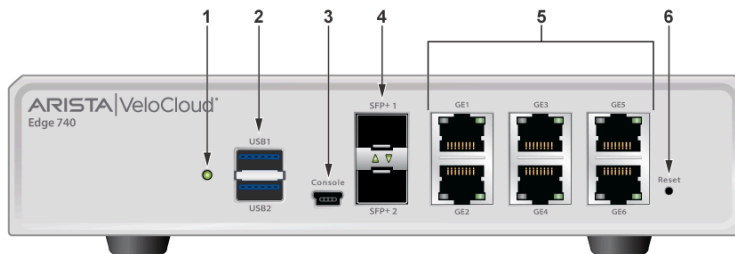

- | | | | | | |
|---|----------------------|---|---------------------|---|--------------|
| 1 | Status LED | 2 | 2x USB Ports | 3 | Console Port |
| 4 | 2x 1G/10G SFP+ Ports | 5 | 6x 2.5G RJ-45 Ports | 6 | Reset Button |

Figure 3-8: Edge 740 Rear Panel

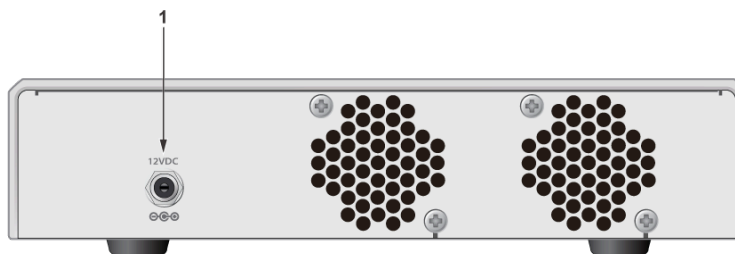

- | | |
|---|--------------------|
| 1 | Power Adapter Port |
|---|--------------------|

Installing the Edge Appliance

The Edge appliance can be placed on a table or a flat surface, or it can be mounted on the wall. The appliance comes with the feet attached. Place it on a flat surface, plug it into a power source, and it's ready to be activated.

Wall Mount the Edge Appliance

Follow these steps to wall mount the appliance:



Note: If your appliance supports an external antenna (for example, Edge 710-5G), wall mount the appliance first before attaching the antennas.

1. Loosen the screws from all four feet of the Edge appliance and remove them. Retain the screws as you will need them later.
2. Align the wall mount bracket on the appliance such that the holes on the appliance align with the holes on the bracket.

Figure 4-1: Wall Mount Bracket



3. Use the same screws to tighten the bracket.

Powering On the Edge Appliance

The power adapter and the power cord are already included in the package. Connect the power cord at the back of the Edge appliance and hand-tighten the thread to secure it. Insert the power adapter into a power outlet and turn it on.

The LED at the front of the device turns White, indicating that the device is booting. After some time, the LED turns Green, indicating that the device is turned on.

Connecting the Edge Appliance to the Network

Connect one end of the Ethernet cable into the ISP modem and the other end into the Edge appliance's GE3, GE4, GE5, GE6, or SFP+ ports to connect to the Internet. The green LED beside each port indicates that the Edge appliance is connected to the Internet. Use the Ethernet cable provided in the package contents to connect the ISP modem to the Edge appliance.

The following table describes the port number for each appliance where you can connect the Ethernet cable to Internet:

Table 1: Internet Port in Edge Appliance

Edge Appliance	Ports
Edge 710 and 710-5G	GE3, GE4, or SFP
Edge 720 and 740	GE3, GE4, GE5, GE6, or SFP+

Note:

Port for Internet Connectivity: Do not plug the cable into the GE1 or GE2 port for Internet connectivity, as these ports are reserved for local LAN connectivity (LAN connectivity to local devices such as computers or printers) or HA connectivity.

Class 1 Laser Product:

This product is designed to install Class 1 laser transceivers, which provide essential optical coupling to the communication network. After you install a Class 1 laser transceiver, your equipment will be classified as a Class 1 Laser Product (Appareil à Laser de Classe 1). You must perform the following tasks:



- Select and install the appropriate Class 1 laser transceiver.
- After installation, ensure that the Allowable Emission Limit (Class 1 AEL) adheres to the standards set forth by EN/IEC 60825, CSA E60825-1, and the Code of Federal Regulations 21 CFR 1040.
- Install laser products rated higher than Class 1.
- Adhere to all safety instructions that accompanied the transceiver prior to installation.
- Select only Class 1 laser devices that have been certified by the relevant authority in your country.

Produit Laser de classe 1:

Ce produit est conçu pour l'installation d'émetteurs-récepteurs laser de classe 1, qui assurent le couplage optique essentiel au réseau de communication. Après l'installation d'un émetteur-récepteur laser de classe 1, votre équipement sera classé comme appareil laser de classe 1. Vous devez effectuer les tâches suivantes:

- Sélectionnez et installez l'émetteur-récepteur laser de classe 1 approprié
- Après l'installation, assurez-vous que la limite d'émission admissible (AEL de classe 1) est conforme aux normes EN/IEC 60825, CSA E60825-1 et au Code of Federal Regulations 21 CFR 1040
- Installez des produits laser de classe supérieure à 1
- Respectez toutes les consignes de sécurité fournies avec l'émetteur-récepteur avant l'installation.
- Utilisez uniquement des lasers de classe 1 certifiés par l'autorité compétente de votre pays.

Note:

Ultimate disposal of this product should be handled in accordance with all national laws and regulations.

Aucune pièce réparable par l'utilisateur à l'intérieur. Confiez toute réparation à un technicien qualifié.

Follow the instructions received in the email to activate your Edge appliance.

6.1 Activating Edge Appliance Using Edge Auto-Activation

Power the Edge appliance and connect it to the Internet to initiate the auto-activation. Edge Auto-activation (Zero Touch Provisioning) simplifies the appliance's activation process by automating the process and eliminating multiple communications with the Support team.

Before you begin the activation process, you need a valid Subscription Identifier (SID) that you received while booking your order with Arista Networks. If you don't have a valid SID, contact [Arista Support](#).

1. Open the email received from VeloCloud.
2. Connect the Edge appliance to the power supply and Internet, if you have not already done so.
3. For Edge 710 and 710-5G appliances:
 - a. Find and connect to the Wi-Fi network that looks like 'velocloud-xxx' (example, velocloud-01c). Use 'vcsecret' as the password for the Wi-Fi network.
 - b. Select the link in the Email to activate your Edge appliance.
4. For Edge 720 and 740 appliances:
 - a. Instead of joining the Wi-Fi network, connect one end of the Ethernet cable to the GE1 or GE2 port in the appliance and the other end to a laptop or computer.
 - b. Open a browser on your laptop or computer and open the activation URL.

Related information

[Activate Edges](#)

Regulatory Model Numbers (RMN)

Table 2: Regulatory Model Numbers

SKU	Regulatory Model Number (RMN)
Edge 710	SDE-EDG-710W
Edge 710-5G	SDE-EDG-710-G
Edge 724S	SDE-EDG-720
	SDE-EDG-740

Taiwan RoHS Information

This section provides the Taiwan RoHS information for appliances this guide covers.

台灣RoHS相關資訊請參考下列網址